

IMPORTANT NOTE

THIS LINERLESS FLUE KIT IS ONLY SUITABLE FOR USE WITH CHIMNEYS THAT MEET THE REQUIREMENTS AS DETAILED BELOW.

Part No. 1188-1028576


Issue 1

12-01-2021

Portway Luxima Linerless Flue Kit Installation Instructions


The linerless flue kit is suitable for use in chimneys that are integrally sound, in good condition and do not exceed a chimney height of 10 metres for an external chimney and 12 metres on an internal chimney, in accordance with BS 5440-1. Chimneys in excess of these heights that do not have an integral clay chimney liner fitted must be lined throughout their length. Figure 1 below shows the generic linerless flue kit installation requirements, see figure 2 overpage for close up further detail of specific requirements

Fig. 1

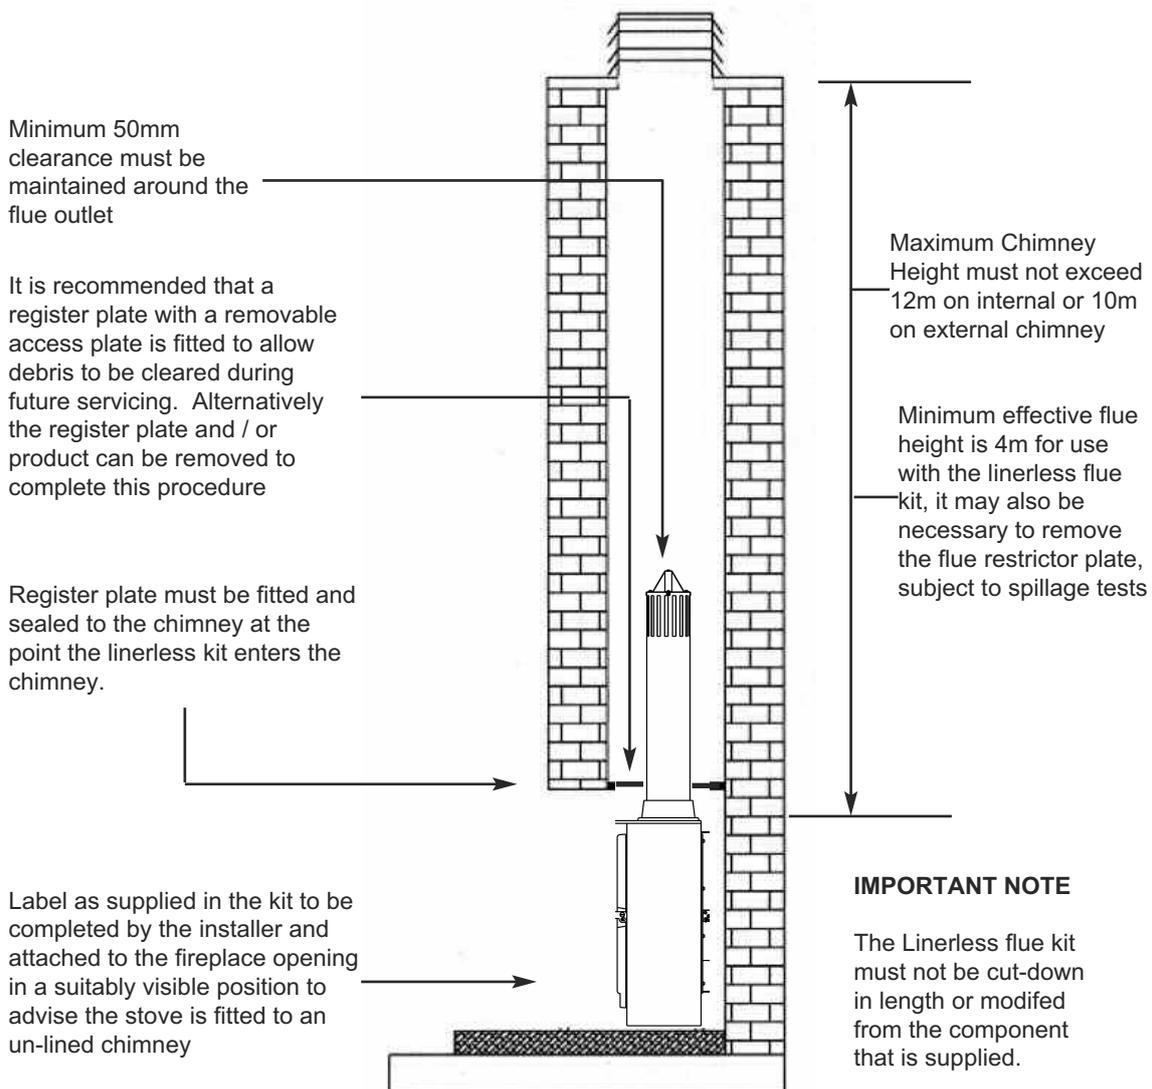

The product should be installed as displayed below in figure 2.

Fig. 2

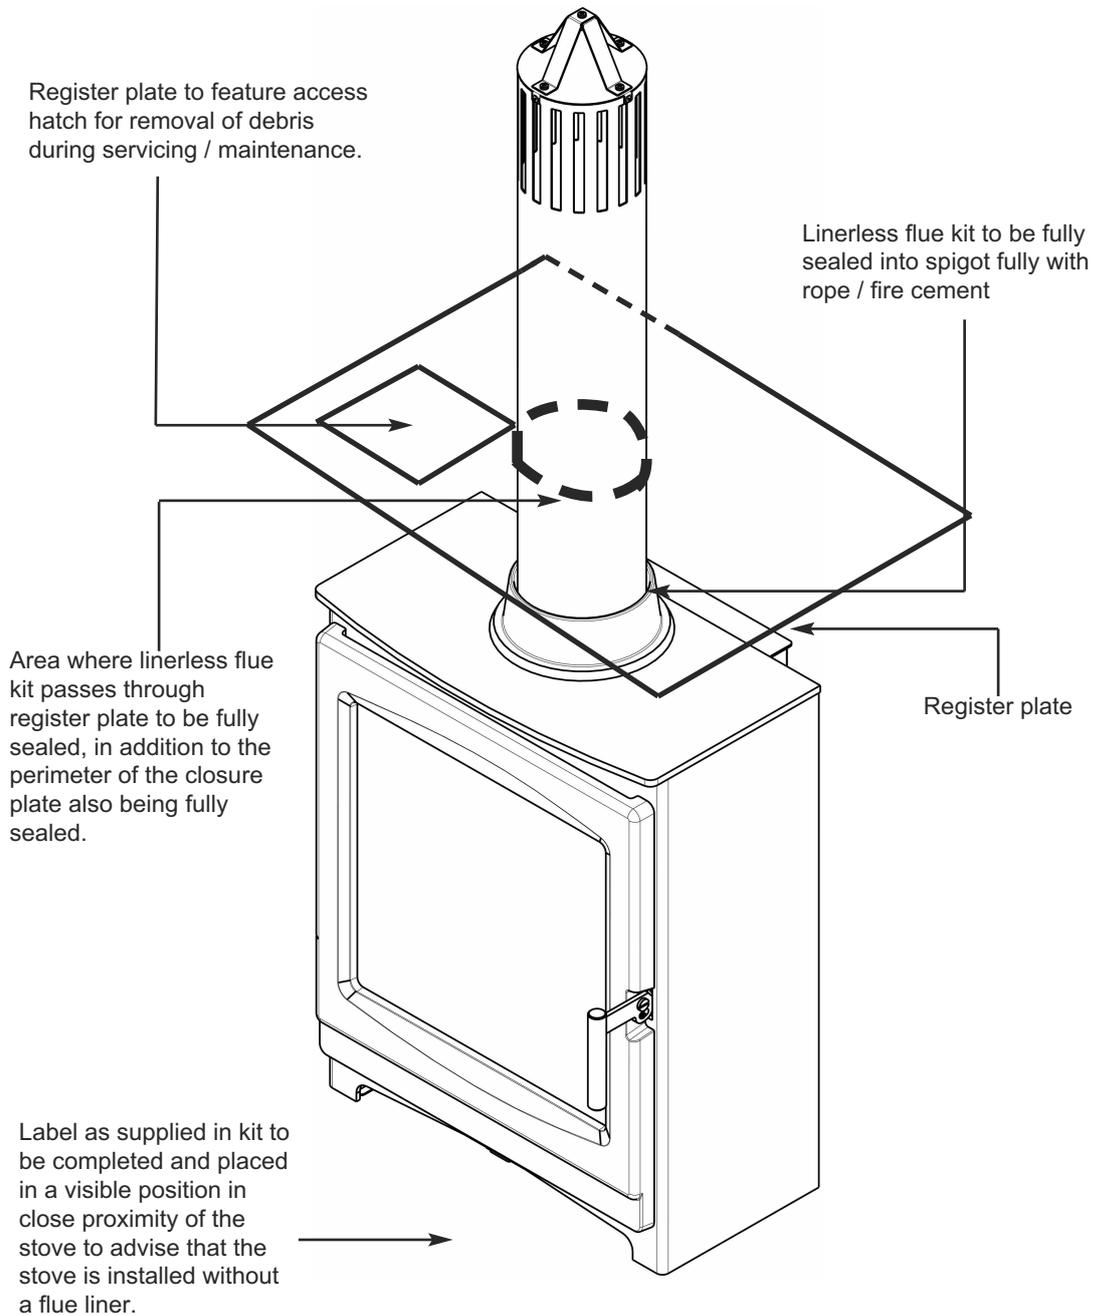

IMPORTANT NOTE : INSTALLATION OF THE LINERLESS FLUE KIT IS SUBJECT TO THESE INSTRUCTIONS BEING STRICTLY ADHERED TO AND TO COMPLETION OF A SATISFACTORY SPILLAGE TEST AS DETAILED IN THE MAIN INSTRUCTION MANUAL.

DO NOT PROCEED WITH COMMISSIONING THE STOVE UNLESS ALL REQUIREMENTS FOR INSTALLATION OF THIS KIT ARE MET, IF IN DOUBT PORTWAY STOVES WOULD RECOMMEND THE CHIMNEY IS FULLY LINED.